



200mA Surface Mount Schottky Barrier Rectifiers - 30V

These Schottky barrier diodes are designed for high speed switching applications, circuit protection, and voltage clamping. Extremely low forward voltage reduces conduction loss. Miniature surface mount package is excellent for hand held and portable applications where space is limited.

- Extremely Fast Switching Speed
- Low Forward Voltage — 0.35 Volts (Typ) @ $I_F = 10 \text{ mAdc}$
- Device Marking: JV

We declare that the material of product compliance with RoHS requirements.

Moisture Sensitivity Level 1

Polarity: Color band denotes cathode end

SCHEMATIC DIAGRAM SOD-523 PACKAGE



MAXIMUM RATINGS ($T_J = 125^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
Reverse Voltage	V_R	30	V

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR-5 Board,* $T_A = 25^\circ\text{C}$	P_D	200	mW
Derate above 25°C		1.57	mW/ $^\circ\text{C}$
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	635	$^\circ\text{C/W}$
Operating/Junction and Storage Temperature	T_J, T_{stg}	-55~150	$^\circ\text{C}$


* FR-4 Minimum Pad

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted) (EACH DIODE)

Characteristic	Symbol	Min	Typ	Max	Unit
Reverse Breakdown Voltage ($I_R = 10 \mu\text{A}$)	$V_{(BR)R}$	30	—	—	Volts
Total Capacitance ($V_R = 1.0 \text{ V}$, $f = 1.0 \text{ MHz}$)	C_T	—	7.6	10	pF
Reverse Leakage ($V_R = 25 \text{ V}$)	I_R	—	0.5	2.0	μAdc
Forward Voltage ($I_F = 0.1 \text{ mAdc}$)	V_F	—	0.22	0.24	Vdc
Forward Voltage ($I_F = 1.0 \text{ mAdc}$)	V_F	—	0.29	0.32	Vdc
Forward Voltage ($I_F = 10 \text{ mAdc}$)	V_F	—	0.35	0.40	Vdc
Forward Voltage ($I_F = 30 \text{ mAdc}$)	V_F	—	0.41	0.5	Vdc
Forward Voltage ($I_F = 100 \text{ mAdc}$)	V_F	—	0.52	1.0	Vdc
Reverse Recovery Time ($I_F = I_R = 10 \text{ mAdc}$, $I_{R(REC)} = 1.0 \text{ mAdc}$, Figure 1)	t_{rr}	—	—	5.0	ns
Forward Current (DC)	I_F	—	—	200	mAdc
Repetitive Peak Forward Current	I_{FRM}	—	—	300	mAdc
Non-Repetitive Peak Forward Current ($t < 1.0 \text{ s}$)	I_{FSM}	—	—	600	mAdc






200mA Surface Mount Schottky Barrier Rectifiers - 30V

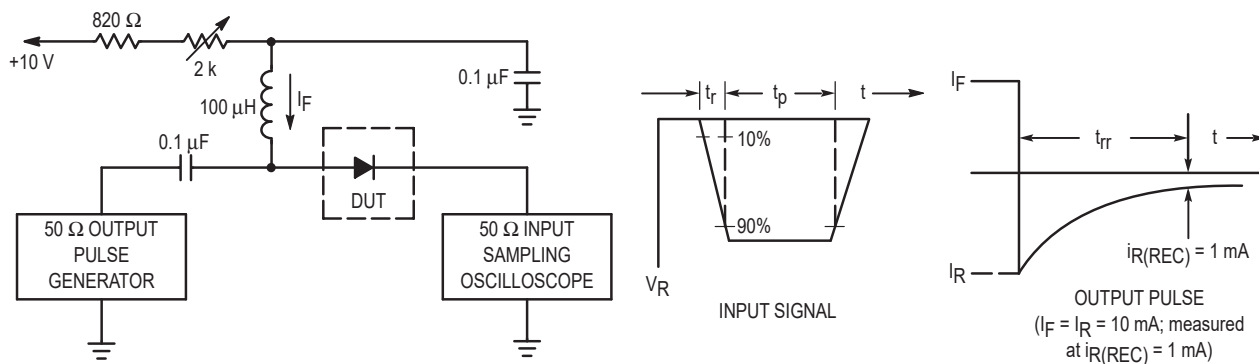

- Notes: 1. A 2.0 kΩ variable resistor adjusted for a Forward Current (I_F) of 10 mA.
2. Input pulse is adjusted so $I_{R(peak)}$ is equal to 10 mA.
3. $t_p \gg t_{rr}$

RECOVERY TIME EQUIVALENT TEST CIRCUIT





ELECTRICAL CHARACTERISTICS CURVES

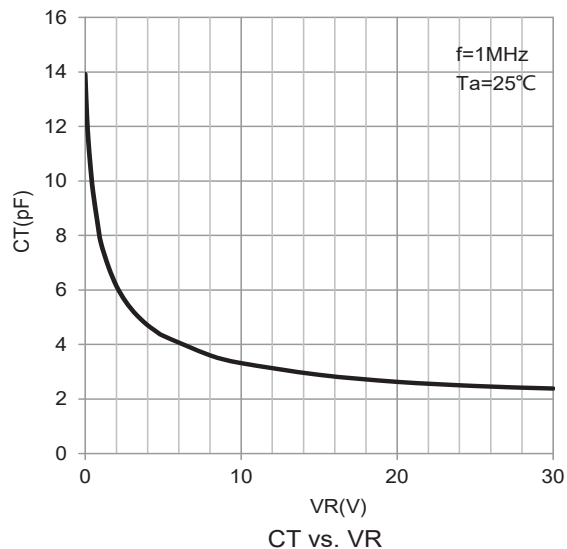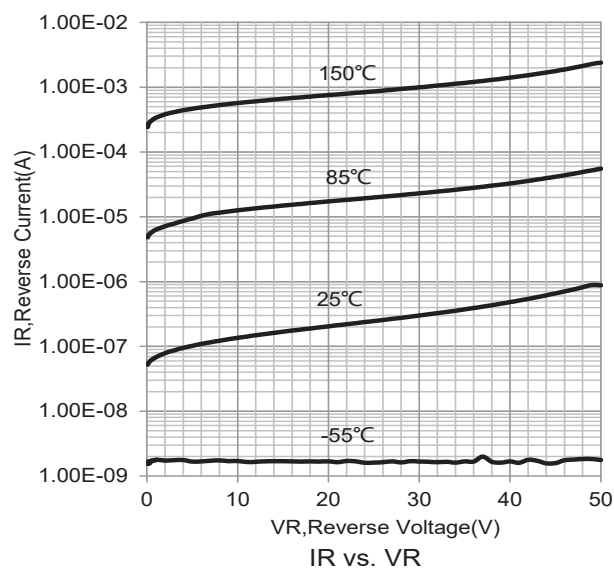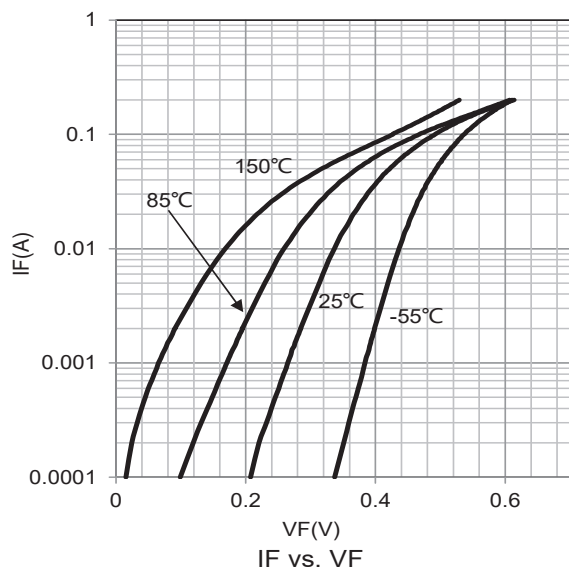



Outline Drawing

SOD-523

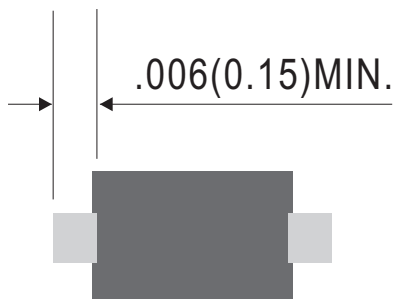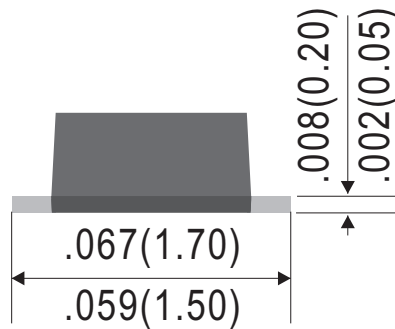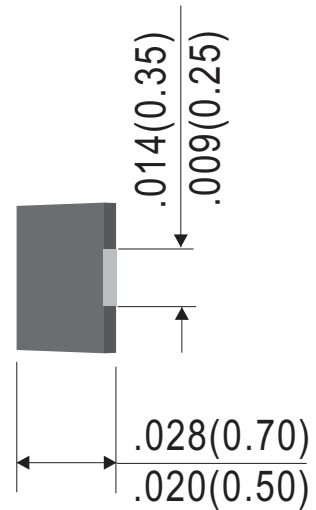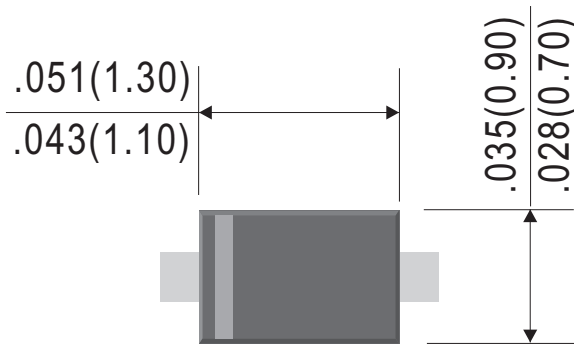


Dimensions in inches and (millimeters)

Rev.C



Suggested Soldering Pad Layout

SOD-523

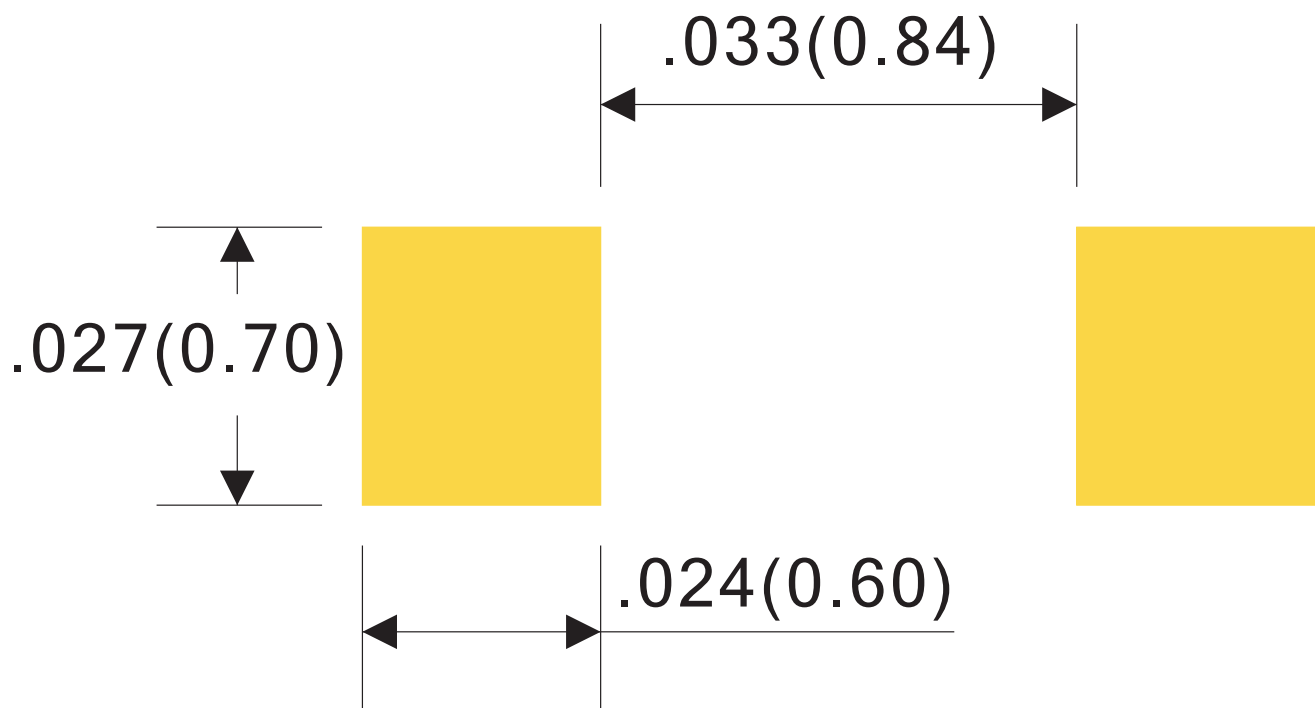

Dimensions in inches and (millimeters)

RevA



Ordering Information:

Device PN	Marking ⁽⁴⁾	Packing
BAT54X-T ⁽¹⁾ G ⁽²⁾ -WS ⁽³⁾	JV	Tape&Reel: 5Kpcs/Reel
BAT54X-T2 ⁽¹⁾ G ⁽²⁾ -WS ⁽³⁾	JV	Tape&Reel: 10 Kpcs/Reel

Note: (1) Packing code, Tape & Reel Packing

(2) Packing code suffix "G" for RoHS product ; Packing code Suffix "H" for halogen free product.
All materials and products supplied comply with the U.S. Toxic Substances Control Act statement, PBT Chemicals.

(3) Willas brand abbreviation, Label Type does not display

(4) There may be additional marking, which relates to the lot trace code information (data code and vendor code), the logo or the environmental category on the device

Disclaimer

WILLAS reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. WILLAS or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on WILLAS data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. WILLAS does not assume any liability arising out of the application or use of any product or circuit.

WILLAS products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of WILLAS. Customers using or selling WILLAS components for use in such applications do so at their own risk and shall agree to fully indemnify WILLAS Inc and its subsidiaries harmless against all claims, damages and expenditures.