

$V_{DS} = -30V$

$R_{DS(ON)}, V_{GS}@-10V, I_{DS}@-5.3A = 70m\Omega$

$R_{DS(ON)}, V_{GS}@-4.5V, I_{DS}@-4.2A = 100m\Omega$

Features

Advanced trench process technology

High Density Cell Design For Ultra Low On-Resistance

Improved Shoot-Through FOM

Pb-Free package is available

RoHS product for packing code suffix "G"

Halogen free product for packing code suffix "H"


▼ Simple Drive Requirement

▼ Small Package Outline

▼ Surface Mount Device



SOT-23



Ordering Information

Device	Marking	Shipping
SE9435LT1	P94	3000/Tape&Reel

Maximum Ratings and Thermal Characteristics ($T_A = 25^\circ C$ unless otherwise noted)

Symbol	Parameter		Limit	Unit
V_{DS}	Drain-Source Voltage		-30	V
V_{GS}	Gate-Source Voltage		± 20	
I_D	Continuous Drain Current		-5.3	A
I_{DM}	Pulsed Drain Current ¹⁾		-20	
P_D	Maximum Power Dissipation	$T_A = 25^\circ C$	1.4	W
		$T_A = 75^\circ C$	0.8	
T_J, T_{stg}	Operating Junction and Storage Temperature Range		-55 to 150	$^\circ C$
$R_{\theta JC}$	Junction-to-Case Thermal Resistance		50	$^\circ C/W$
$R_{\theta JA}$	Junction-to-Ambient Thermal Resistance (PCB mounted) ²⁾		90	

Note: 1. Repetitive Rating: Pulse width limited by the maximum junction temperature

2. 1-in² 2oz Cu PCB board

3. Guaranteed by design; not subject to production testing

30V P-Channel Enhancement-Mode MOSFET
ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Test Condition	Min	Typ	Max	Unit
Static						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} = 0V, I _D = -250uA	-30			V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} = -4.5V, I _D = -4.2A		70.0	100.0	mΩ
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} = -10V, I _D = -5.3A		50.0	70.0	
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D = -250uA	-1	-1.7	-3	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = -24V, V _{GS} = 0V			1	uA
I _{GSS}	Gate Body Leakage	V _{GS} = ± 20V, V _{DS} = 0V			±100	nA
g _{fs}	Forward Transconductance	V _{DS} = -10V, I _D = -5.3A		10		S
Dynamic ³⁾						
Q _g	Total Gate Charge	V _{DS} =-15V, I _D = -5.3A V _{GS} = -10V		28		nC
Q _{gs}	Gate-Source Charge			3		
Q _{gd}	Gate-Drain Charge			7		
t _{d(on)}	Turn-On Delay Time	V _{DD} = -15V, R _L = 15 Ω I _D = -1A, V _{GEN} = -10V R _G = 6		9		ns
t _r	Turn-On Rise Time			15		
t _{d(off)}	Turn-Off Delay Time			75		
t _f	Turn-Off Fall Time			40		
C _{iss}	Input Capacitance	V _{DS} = -15V, V _{GS} = 0V f = 1.0 MHz		745		pF
C _{oss}	Output Capacitance			440		
C _{rss}	Reverse Transfer Capacitance			120		
Source-Drain Diode						
I _S	Max. Diode Forward Current				-2.6	A
V _{SD}	Diode Forward Voltage	I _S = -2.6A, V _{GS} = 0V			-1.3	V

Note Pulse test: pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$



30V P-Channel Enhancement-Mode MOSFET

TYPICAL ELECTRICAL CHARACTERISTICS

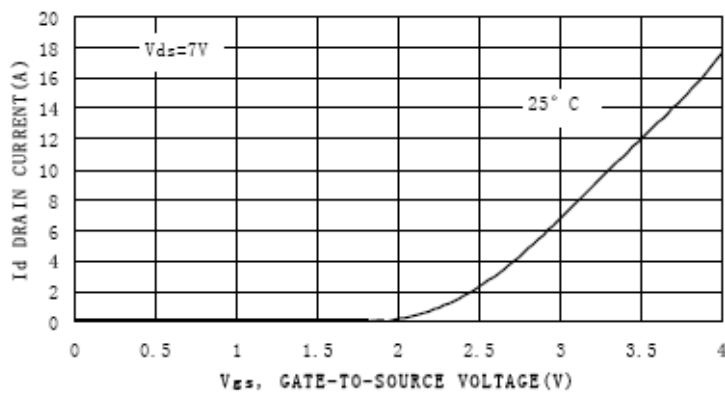


Figure 1. Transfer Characteristics

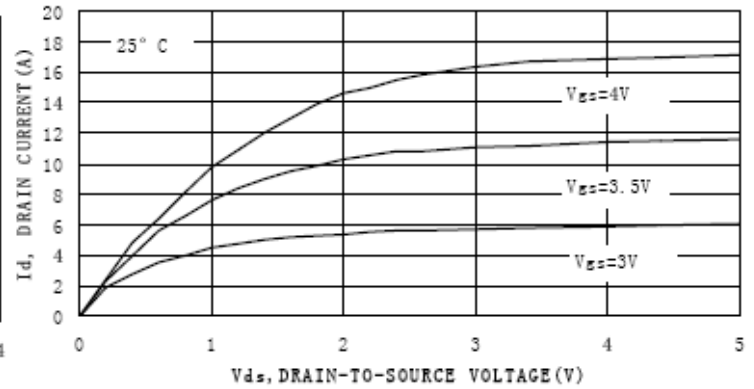


Figure 2. On-Region Characteristics

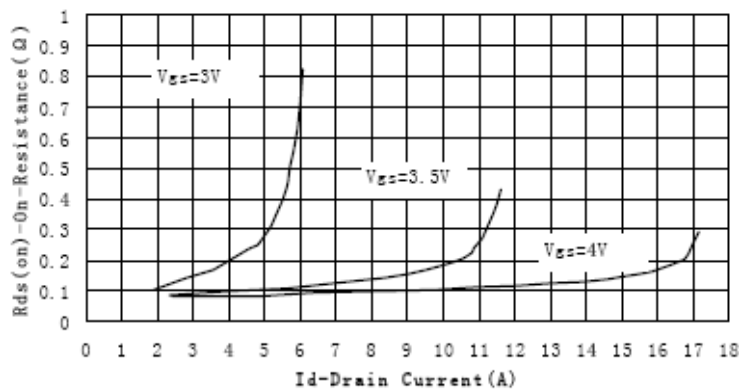


Figure 3. On-Resistance versus Drain Current



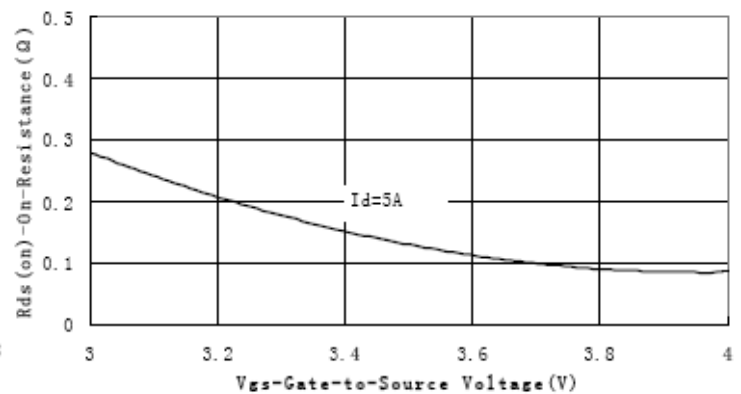



Figure 4. On-Resistance vs. Gate-to-Source Voltage

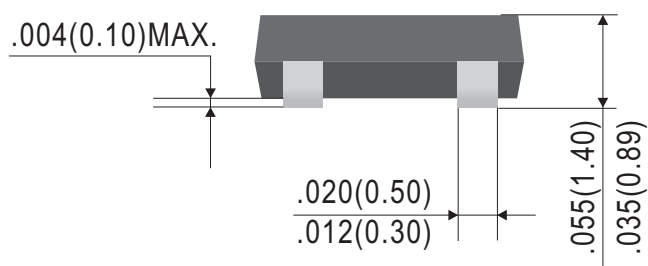

SOT-23

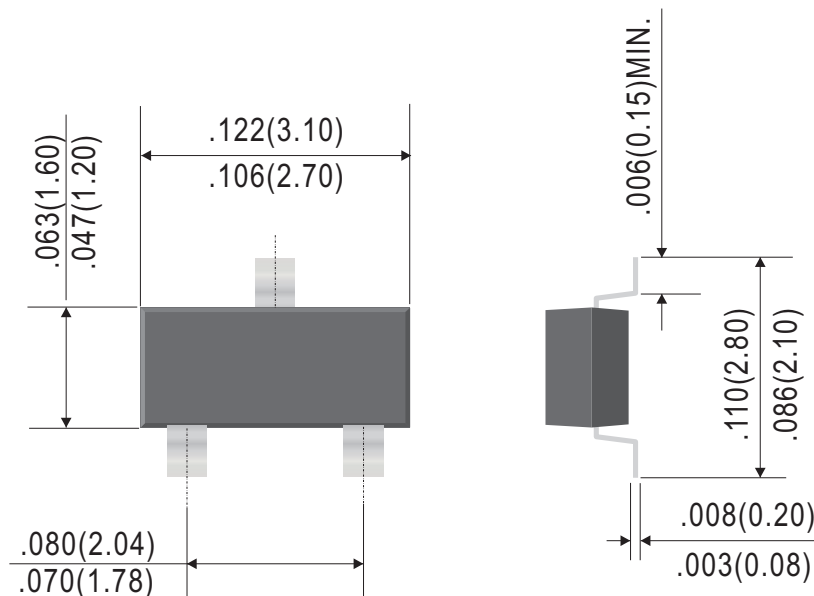

Dimensions in inches and (millimeters)

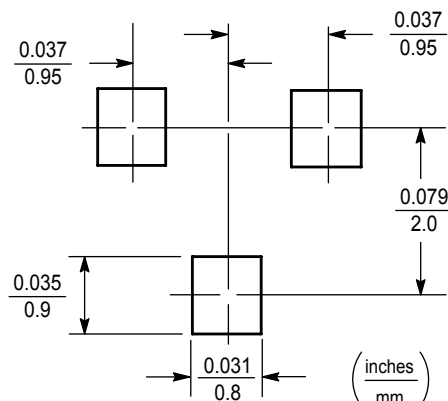

Ordering Information:

Device PN	Packing
SE9435LT1G ⁽¹⁾ -WS	Tape&Reel: 3 Kpcs/Reel

Note: (1) RoHS product for packing code suffix "G" ; Halogen free product for packing code suffix "H"

*****Disclaimer*****

WILLAS reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. WILLAS or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on WILLAS data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. WILLAS does not assume any liability arising out of the application or use of any product or circuit.

WILLAS products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of WILLAS. Customers using or selling WILLAS components for use in such applications do so at their own risk and shall agree to fully indemnify WILLAS Inc and its subsidiaries harmless against all claims, damages and expenditures.