

WILLAS


Ultra High Speed Switching Application



1SS184

Features

- Low forward voltage : $V_{F(3)} = 0.9V$ (typ.)
 - Fast reverse recovery time : $t_{rr} = 1.6ns$ (typ.)
 - Small total capacitance : $C_T = 0.9pF$ (typ.)
 - We declare that the material of product compliance with RoHS requirements.
 - RoHS product for packing code suffix "G"
 - Halogen free product for packing code suffix "H"
- Moisture Sensitivity Level 1**

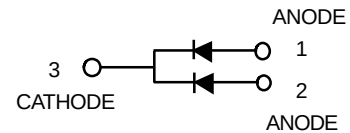

Device Marking

1SS184 = B3

Maximum Ratings ($T_A = 25^\circ C$)

Characteristic	Symbol	Rating	Unit
Maximum (peak) reverse voltage	V_{RM}	85	V
Reverse voltage	V_R	80	V
Maximum (peak) forward current	I_{FM}	300 *	mA
Average forward current	I_O	100 *	mA
Surge current (10ms)	I_{FSM}	2 *	A
Power dissipation	P	150	mW
Junction temperature	T_J	125	$^\circ C$
Operating/Storage temperature range	T_{slg}	-55~+125	$^\circ C$

* : Unit rating. Total rating = Unit rating $\times$ 0.7.

Electrical Characteristics ($T_A = 25^\circ C$)

Characteristic	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Forward voltage	$V_{F(1)}$	—	$I_F = 1mA$	—	0.60	—	V
	$V_{F(2)}$	—	$I_F = 10mA$	—	0.72	—	
	$V_{F(3)}$	—	$I_F = 100mA$	—	0.90	1.20	
Reverse current	$I_{R(1)}$	—	$V_R = 30V$	—	—	0.1	A
	$I_{R(2)}$	—	$V_R = 80V$	—	—	0.5	
Total capacitance	C_T	—	$V_R = 0, f = 1MHz$	—	0.9	3.0	pF
Reverse recovery time	t_{rr}	—	$I_F = 10mA$ (Fig.1)	—	1.6	4.0	ns

WILLAS

Ultra High Speed Switching Application



1SS184

Electrical characteristic curves

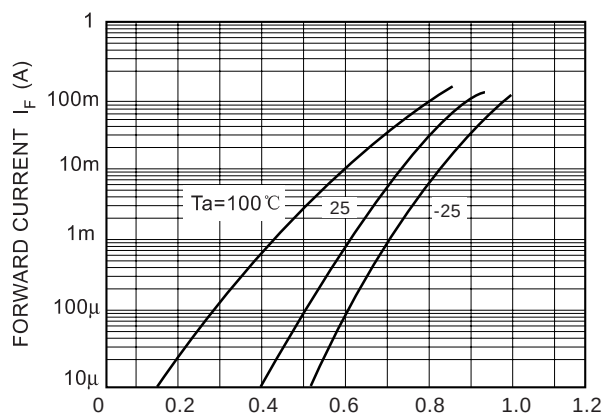


Fig.1 FORWARD VOLTAGE V_F (V)

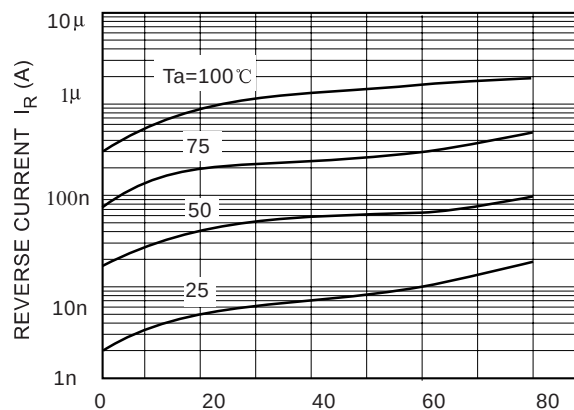


Fig.2 REVERSE VOLTAGE V_R (V)

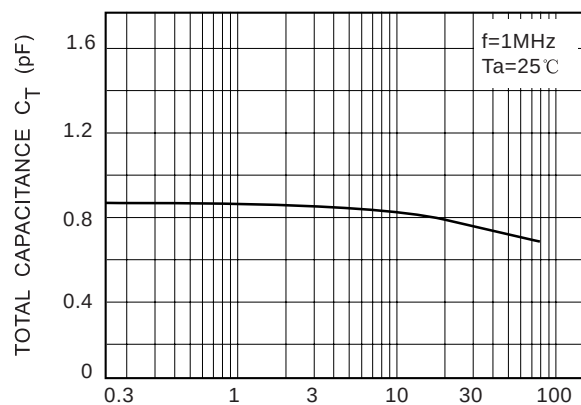


Fig.3 REVERSE VOLTAGE V_R (V)

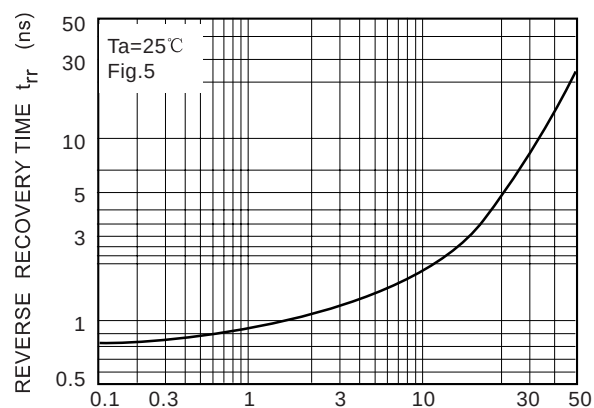


Fig.4 FORWARD CURRENT I_F (mA)



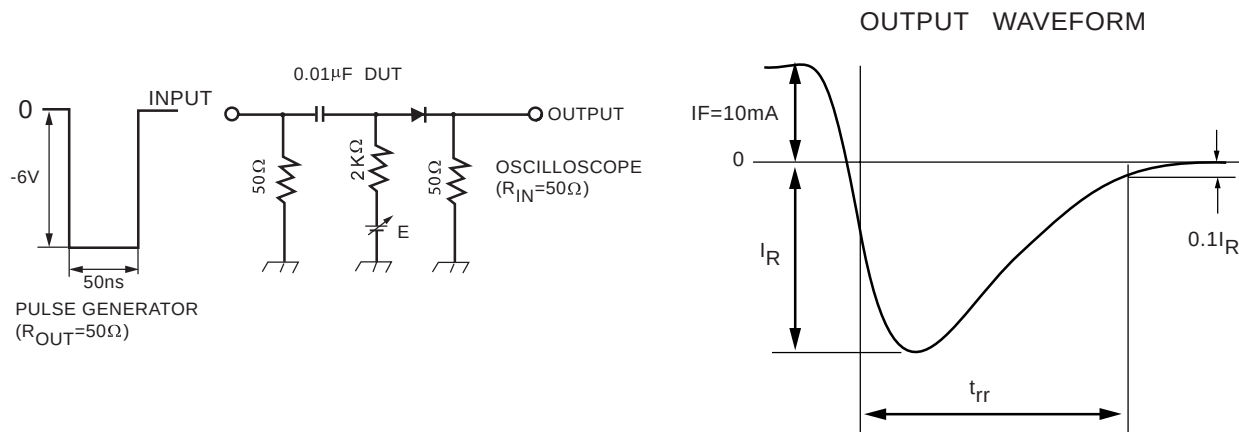


Fig.5 Reverse recovery time (t_{rr}) test circuit

Outline Drawing

SOT-23

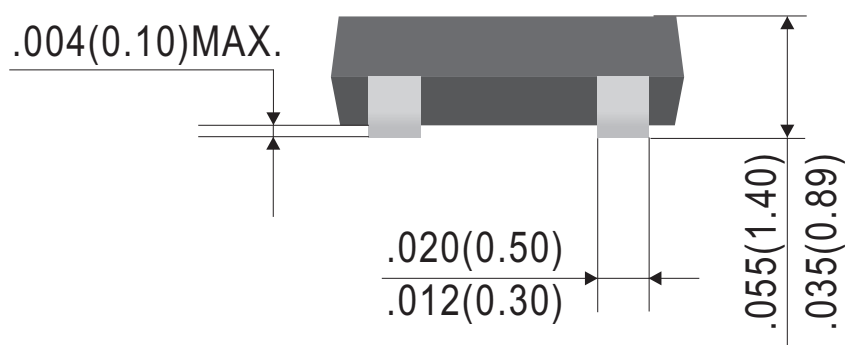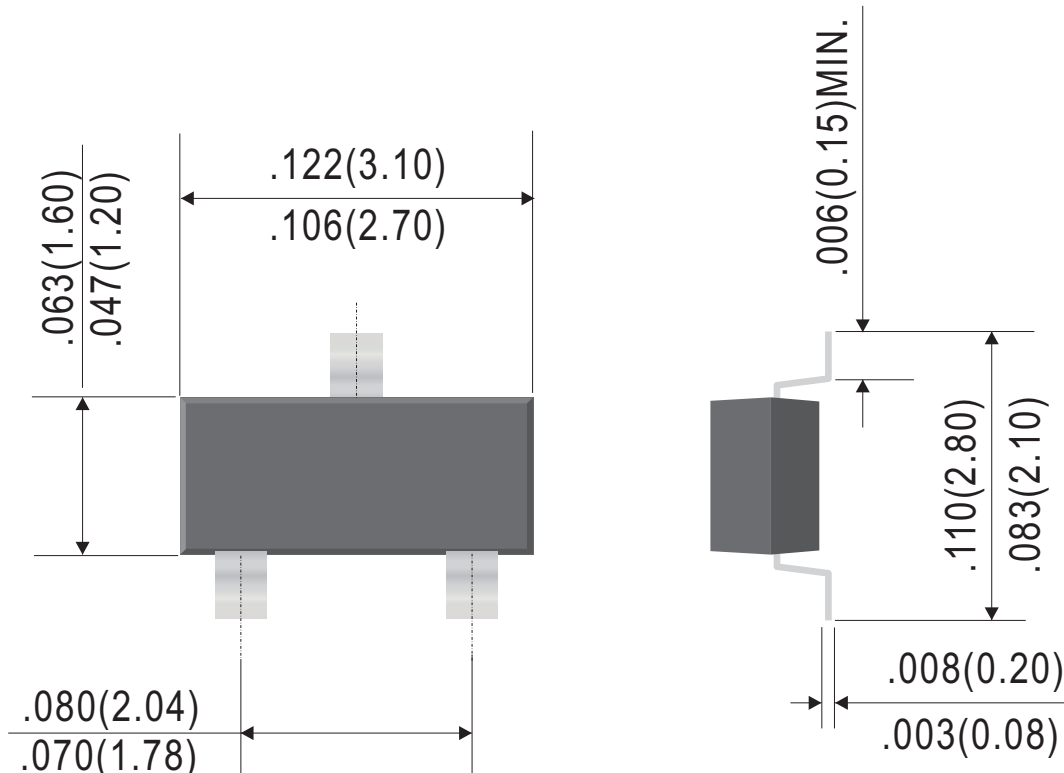

Dimensions in inches and (millimeters)

Rev.D



WILLAS



Ultra High Speed Switching Application

1SS184

Ordering Information:

Device PN	Packing
1SS184-T ⁽¹⁾ G ⁽²⁾ -WS	Tape&Reel: 3 Kpcs/Reel

Note: (1) Packing code, Tape&Reel Packing

(2) RoHS product for packing code suffix "G" ; Halogen free product for packing code suffix "H"

Disclaimer

WILLAS reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. WILLAS or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on WILLAS data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. WILLAS does not assume any liability arising out of the application or use of any product or circuit.

WILLAS products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of WILLAS. Customers using or selling WILLAS components for use in such applications do so at their own risk and shall agree to fully indemnify WILLAS Inc and its subsidiaries harmless against all claims, damages and expenditures.