

150mA Surface Mount Switching Diode-100V SOT-23 Package

MMBD4448

SOT-23

FEATURES

- * Fast switching Speed.
- * Electrically Identical to Standard JEDEC
- * High Conductance
- * Surface Mount Package Ideally Suited for Automatic Insertion.
- * RoHS product for packing code suffix "G"
- Halogen free product for packing code suffix "H"
- * **Moisture Sensitivity Level 1**



MECHANICAL DATA

Case: SOT-23 plastic case.

Terminals : Solderable per MIL-STD-750, Method 2026

Standard packaging: 8mm tape

Weight: approximately 0.0003 ounces, 0.0084 grams

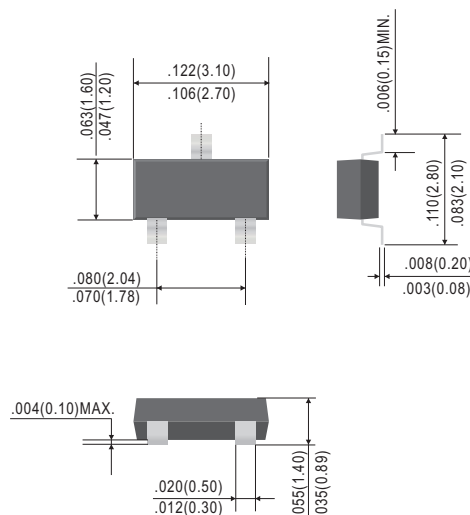

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

RATINGS	SYMBOL	MMBD4448	UNIT
Marking Code		A3	
Reverse Voltage	V_R	75	Volts
Peak Reverse Voltage	V_{RM}	100	Volts
RMS Voltage	V_{RMS}	50	Volts
Maximum DC Blocking Voltage	V_{DC}	75	Volts
Maximum Average Forward Current	I_{AV}	150	mAmps
Peak Forward Surge Current 1.0us	I_{FSM}	4	Amps
Power Dissipation Derate Above $T_a=25^\circ\text{C}$	P_{TOT}	250	mW
Typical Thermal Resistance	$R_{\theta JA}$	357	$^\circ\text{C/W}$
Typical Junction Capacitance (Note 1)	C_J	4	pF
Operating and Storage Temperature Range	T_J, T_{STG}	-55~+150	$^\circ\text{C}$

Electrical Ratings @ $T_A=25^\circ\text{C}$

CHARACTERISTICS	SYMBOL	MMBD4448	UNIT
Maximum Forward Voltage @ 0.005A DC	V_F	0.72	Volts
@0.1A DC		1.00	
Maximum Average Reverse Current @75V DC	I_R	2.5	μAmps
@25V DC		25	nAmps
Reverse Recovery Time (Note 2)	T_{rr}	4	nsec

Note:

1. C_J at $V_R=0$, $f=1\text{MHz}$

2. From $I_F=10\text{mA}$ to $I_R=1\text{mA}$, $V_R=6\text{Volts}$, $R_L=100\Omega$



WILLAS



**150mA Surface Mount Switching Diode-100V
SOT-23 Package**

MMBD4448

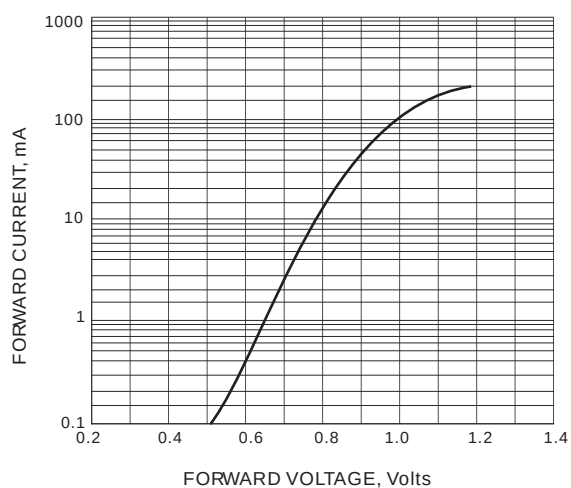


FIG. 1-TYPICAL FORWARD CHARACTERISTIC

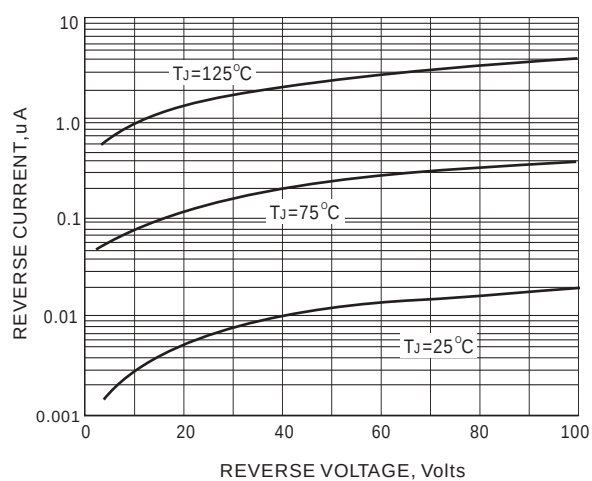


FIG. 2-TYPICAL REVERSE CHARACTERISTICS

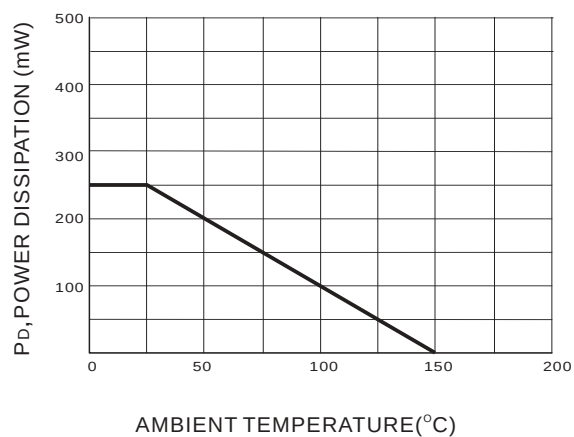


FIG. 3 POWER DERATING CURVE



WILLAS



**150mA Surface Mount Switching Diode-100V
SOT-23 Package**

MMBD4448

Ordering Information:

Device PN	Packing
MMBD4448-T ⁽¹⁾ G ⁽²⁾ -WS	Tape&Reel: 3 Kpcs/Reel

Note: (1) Packing code, Tape & Reel Packing

(2) RoHS product for packing code suffix "G" ; Halogen free product for packing code suffix "H"

Disclaimer

WILLAS reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. WILLAS or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on WILLAS data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. WILLAS does not assume any liability arising out of the application or use of any product or circuit.

WILLAS products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of WILLAS. Customers using or selling WILLAS components for use in such applications do so at their own risk and shall agree to fully indemnify WILLAS Inc and its subsidiaries harmless against all claims, damages and expenditures.