


4-CHANNEL LOW CAPACITANCE ESD PROTECTION DIODES ARRAY

DESCRIPTIONS

The SESD099-04BT1 is a 4-channel ultra low capacitance rail clamp ESD protection diodes array. Each channel consists of a pair of ESD diodes that steer positive or negative ESD current to either the positive or negative rail. A zener diode is integrated in to the array between the positive and negative supply rails. In the typical applications, the negative rail pin (assigned as GND) is connected with system ground. The Positive ESD current is steered to the ground through an ESD diode and Zener diode and the positive ESD voltage is clamped to the zener voltage. The SESD099-04BT1 is idea to protect high speed data lines. Three package type is provided for easy PCB layout.

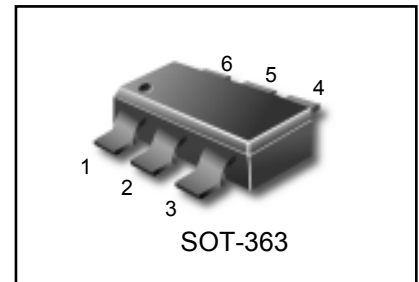

FEATURES

- * 4 channels of ESD protection;
- * Provides ESD protection to IEC61000-4-2 level 4
 - $\pm 15\text{kV}$ air discharge
 - $\pm 8\text{kV}$ contact discharge;
- * Channel I/O to GND capacitance: 0.9pF(Max)
- * Channel I/O to I/O capacitance: 0.45pF(Max)
- * Low clamping voltage;
- * Low operating voltage;
- * Improved zener structure;
- * Optimized package for easy high speed data lines PCB layout;
- * RoHS compliant.
- * **Pb-Free package is available**
 - RoHS product for packing code suffix "G"
 - Halogen free product for packing code suffix "H"
- * **Moisture Sensitivity Level 1**

APPLICATIONS

- * HDMI / DVI ports;
- * Display Port interface;
- * 10M / 100M / 1G Ethernet;
- * USB 2.0 interface;
- * VGA interface
- * Set-top box;
- * Flat panel Monitors / TVs;
- * PC / Note book


ORDERING INFORMATION

Part No.	Package	Marking	Material	Shipping
SESD099-04BT1	SOT-363	C96	Halogen	3000Tape&Reel



4-CHANNEL LOW CAPACITANCE ESD PROTECTION DIODES ARRAY

PIN CONFIGURATION

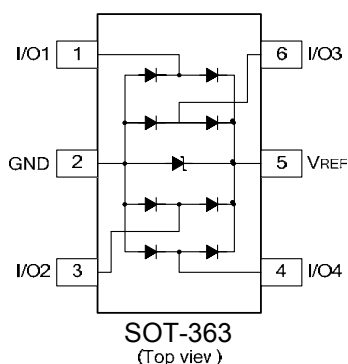

ABSOLUTE MAXIMUM RATINGS

Characteristics	Symbol	Ratings	Unit
Peak Pulse Power(8/20μs)	P _{PP}	150	W
Peak Pulse Current(8/20μs)	I _{PP}	5	A
ESD per IEC 61000-4-2(Air)	V _{ESD1}	±15kV	kV
ESD per IEC 61000-4-2(Contact)	V _{ESD2}	±8kV	kV
Operating Temperature Range	T _{opr}	-55 ~ +125	°C
Storage Temperature Range	T _{stg}	-55 ~ +150	°C







ELECTRICAL CHARACTERISTICS(T_{amb}=25°C)

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Reverse Working Voltage	V _{RWM}	Any I/O pin to GND			5	V
Reverse Breakdown Voltage	V _{BR}	t _t =1mA; Any I/O pin to GND	6			V
Reverse Leakage Current	I _R	V _{RWM} =5V, T=25°C; Any I/O pin to GND			1	μA
Positive Clamping Voltage	V _{C1}	I _{PP} =1A, t _p =8/20MS; Positive pulse; Any I/O pin to GND		8.5	12.0	V
Negative Clamping Voltage	V _{C2}	I _{PP} =1A, t _p =8/20μS; Negative pulse; Any I/O pin to GND		1.8		V
Junction Capacitance Between Channel	C _{J1}	V _R =0V, f=1MHz; Between I/O pins		0.35	0.45	pF
Junction Capacitance Between I/O And GND	C _{J2}	V _R =0V, f=1MHz; Any I/O pin to GND			0.9	pF



4-CHANNEL LOW CAPACITANCE ESD PROTECTION DIODES ARRAY


TYPICAL ELECTRICAL CHARACTERISTICS CURVE

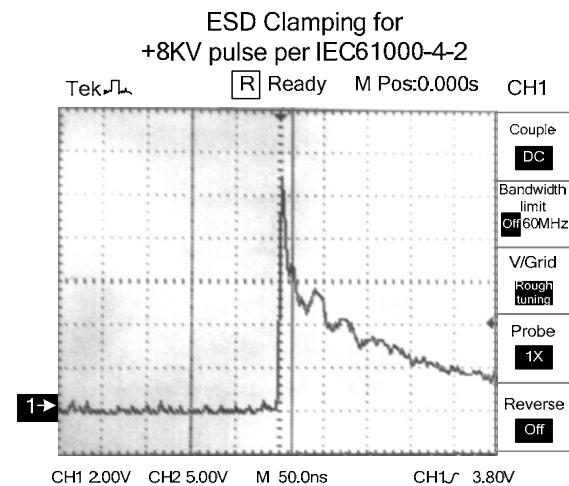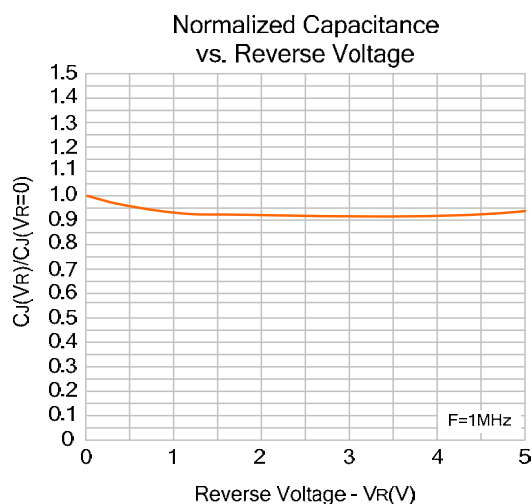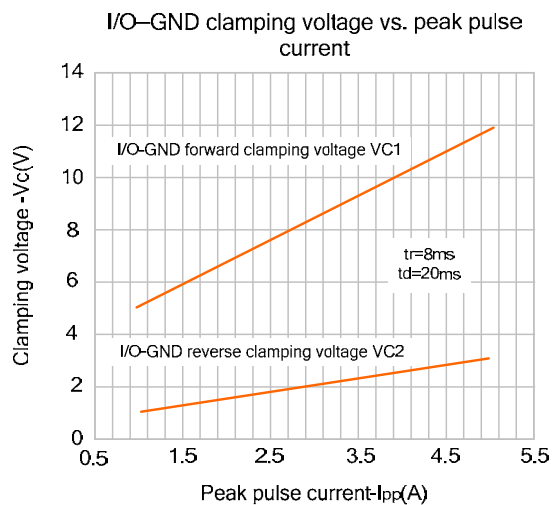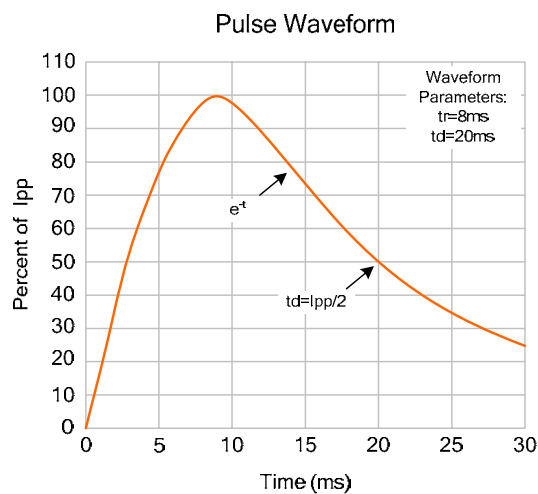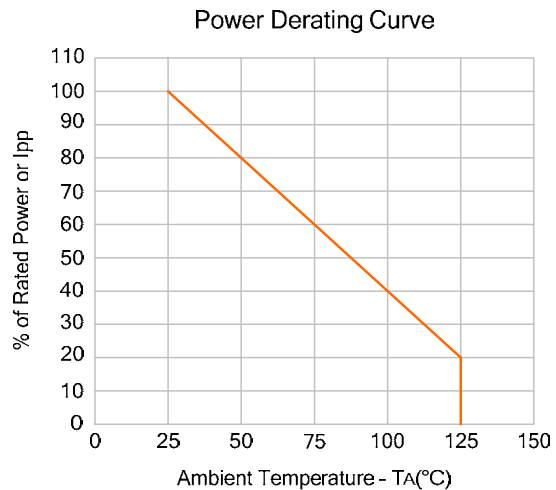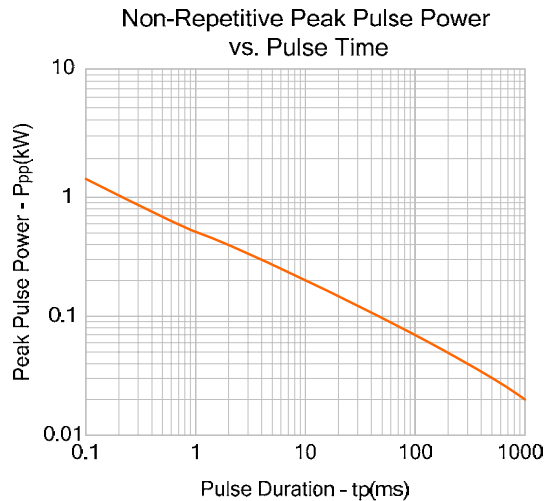




4-CHANNEL LOW CAPACITANCE ESD PROTECTION DIODES ARRAY

TYPICAL ELECTRICAL CHARACTERISTICS CURVE

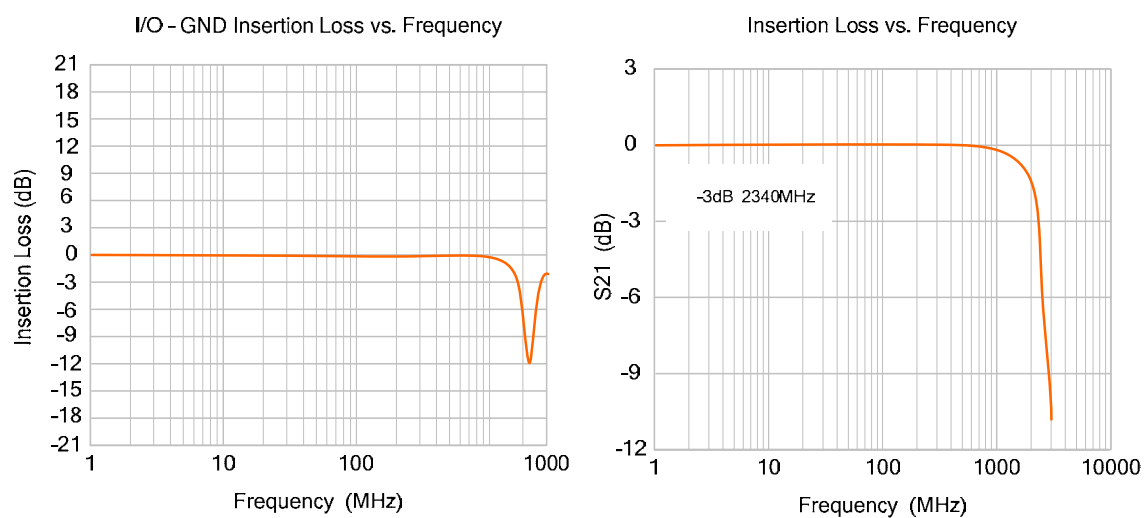




4-CHANNEL LOW CAPACITANCE ESD PROTECTION DIODES ARRAY

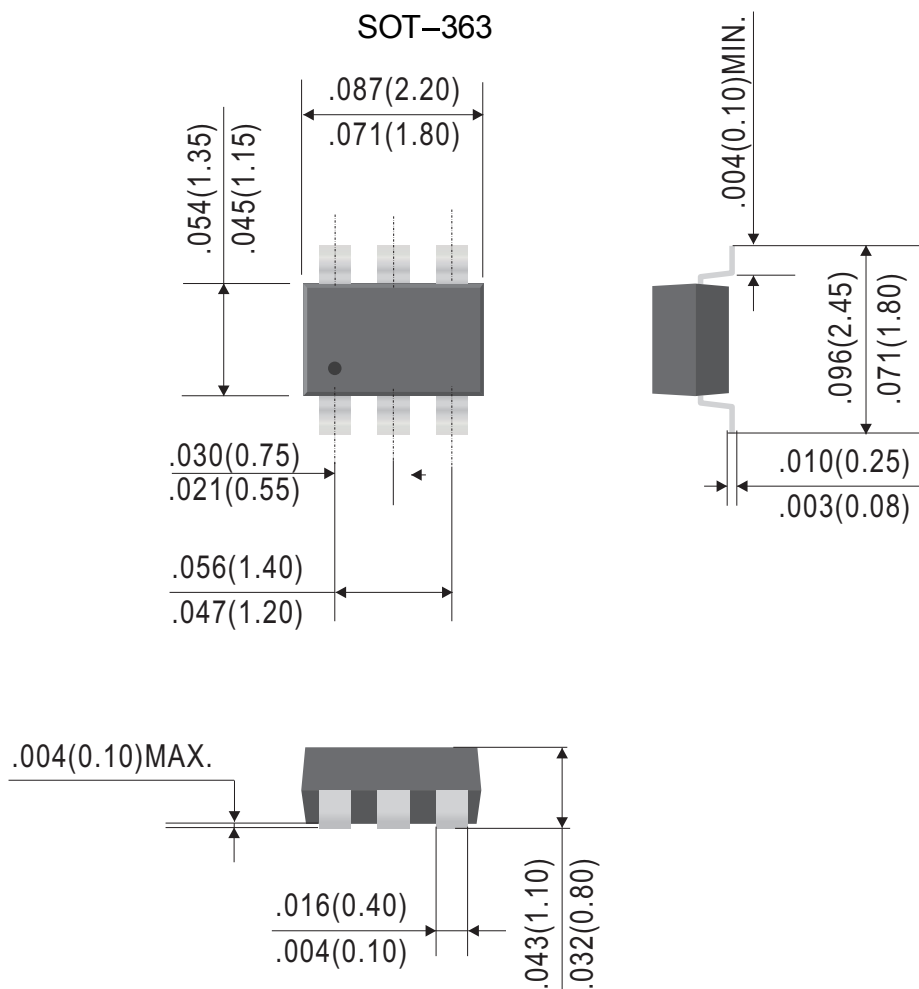

Dimensions in inches and (millimeters)

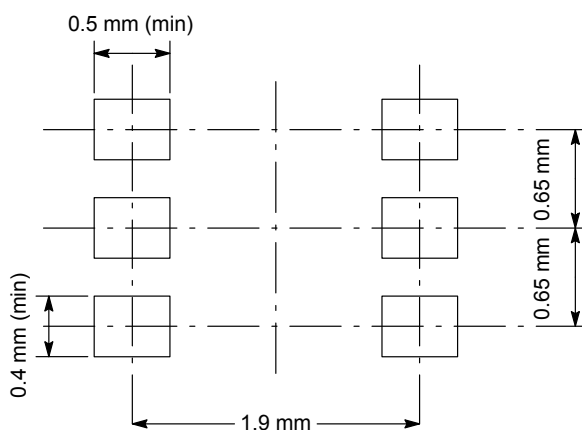



4-CHANNEL LOW CAPACITANCE ESD PROTECTION DIODES ARRAY

Ordering Information:

Device PN	Packing
SESD099-04BT1 -T ⁽¹⁾ G ⁽²⁾ -WS	Tape&Reel: 3 Kpcs/Reel

Note: (1) Packing code, Tape & Reel

(2) RoHS product for packing code suffix "G" ; Halogen free product for packing code suffix "H"

Disclaimer

WILLAS reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. WILLAS or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on WILLAS data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. WILLAS does not assume any liability arising out of the application or use of any product or circuit.

WILLAS products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of WILLAS. Customers using or selling WILLAS components for use in such applications do so at their own risk and shall agree to fully indemnify WILLAS Inc and its subsidiaries harmless against all claims, damages and expenditures.