



Transient Voltage Suppressors for ESD Protection

General Description

The SESD1Z SERIES is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium.

Applications

- Cellular Phone Handsets and Accessories
- Microprocessor based equipment
- Personal Digital Assistants(PDA'S)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Pagers Peripherals
- **Pb-Free package is available**
RoHS product for packing code suffix "G"
Halogen free product for packing code suffix "H"
- **Moisture Sensitivity Level 1**

Features

- Small Body Outline Dimensions
- 600 Watts peak pulse power ($t_p = 8/20\mu s$)
- Transient protection for data lines to
- Small package for use in portable electronics
- Suitable replacement for MLV's in ESD protection applications
- Protects one I/O or power line
- Low clamping voltage
- Low leakage current
- Solid-state silicon-avalanche technology

Complies with the following standards IEC61000-4-2

Level 4 15 kV (air discharge)


8 kV(contact discharge)

MIL STD 883E - Method 3015-7 Class 3
25 kV HBM (Human Body Model)

Functional diagram



SOD-123

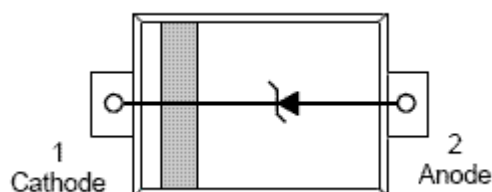

Absolute Ratings ($T_{amb}=25^{\circ}C$)


Symbol	Parameter	Value	Units
P_{PK}	Peak Pulse Power ($t_p = 8/20\mu s$)	600	W
V_{ESD}	ESD Voltage(HBM Waveform per IEC 61000-4-2)	8	kV
T_L	Maximum lead temperature for soldering during 10s	260	$^{\circ}C$
T_{STG}	Storage Temperature Range	-55 to +150	$^{\circ}C$
T_J	Maximum junction temperature	-55 to +125	$^{\circ}C$
I_{PP}	Maximum Reverse Peak Pulse Current	24	A



Transient Voltage Suppressors for ESD Protection

Electrical Parameter

Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
I_T	Test Current
V_{BR}	Breakdown Voltage @ I_T
I_F	Forward Current
V_F	Forward Voltage @ I_F

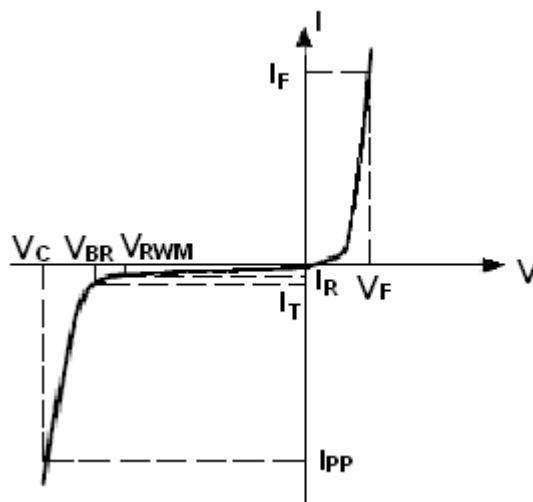

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Part Numbers	V_{BR}			I_T	V_{RWM}	I_R	V_F	I_F	C
	Min	Typ	Max				Max.		Typ. (Note1)
	V	V	V				V		pF
SESD1Z5V	6.1	6.7	7.2	1.0	5.0	1	1.25	200	430
SESD1Z12V	13.3	14.0	14.7	1.0	12.0	1	1.25	200	300

1. Capacitance is measured at $f=1\text{MHz}$, $V_R=0\text{V}$, $T_A=25^\circ\text{C}$.

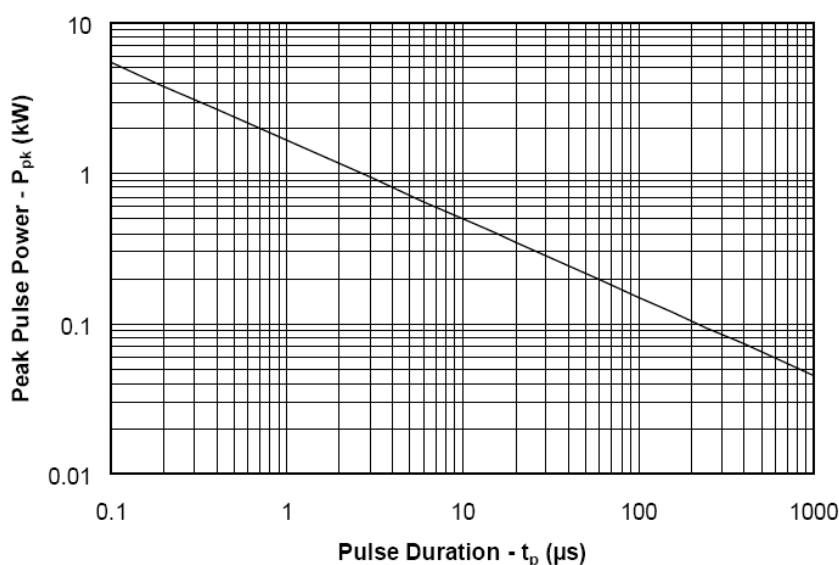


Fig.1 Non-Repetitive Peak Pulse Power vs. Pulse Time



Transient Voltage Suppressors for ESD Protection

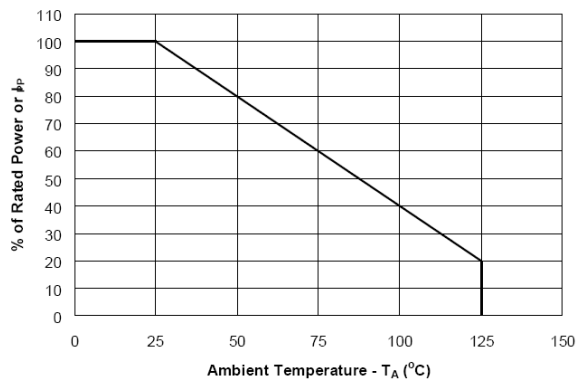


Fig.2 Power Derating Curve

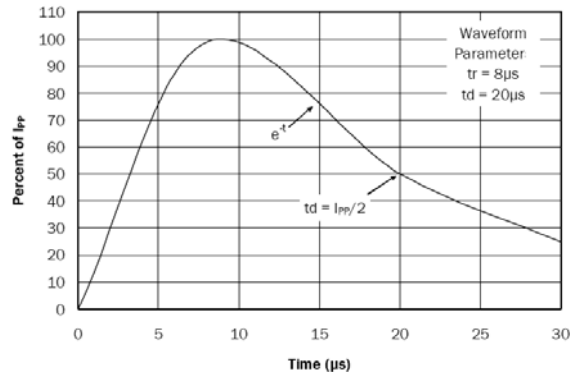


Fig.3 Waveform

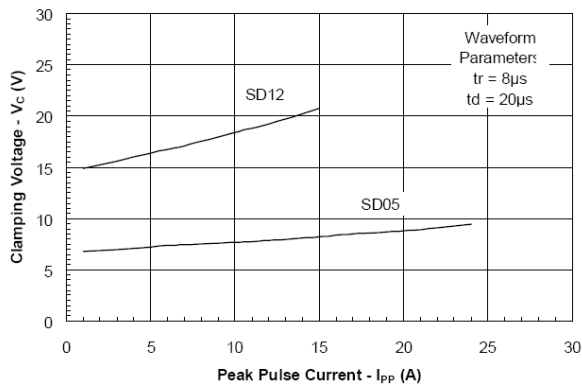


Fig.4 Clamping Voltage vs. Peak Pulse Current

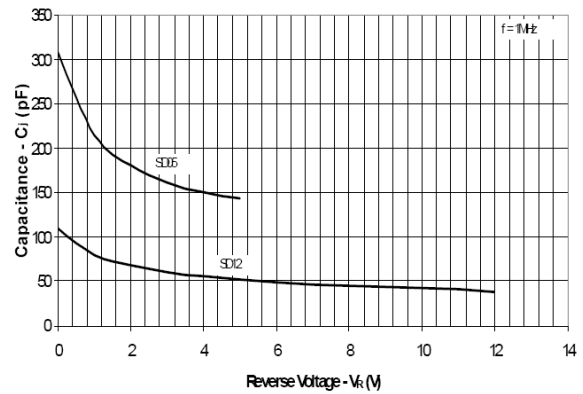


Fig.5 Capacitance vs. Reverse Voltage

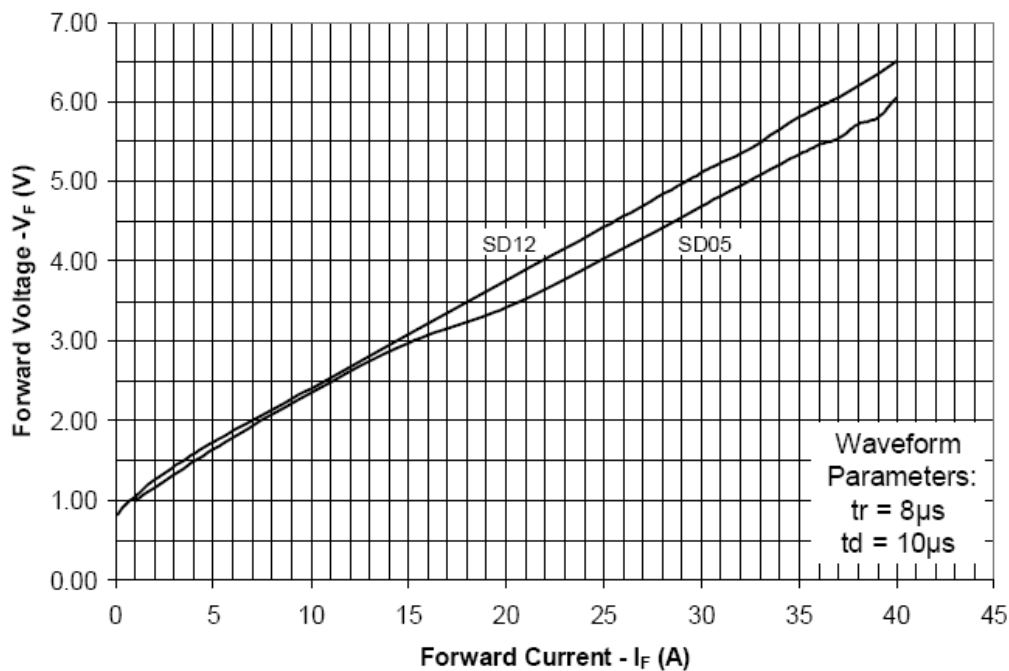
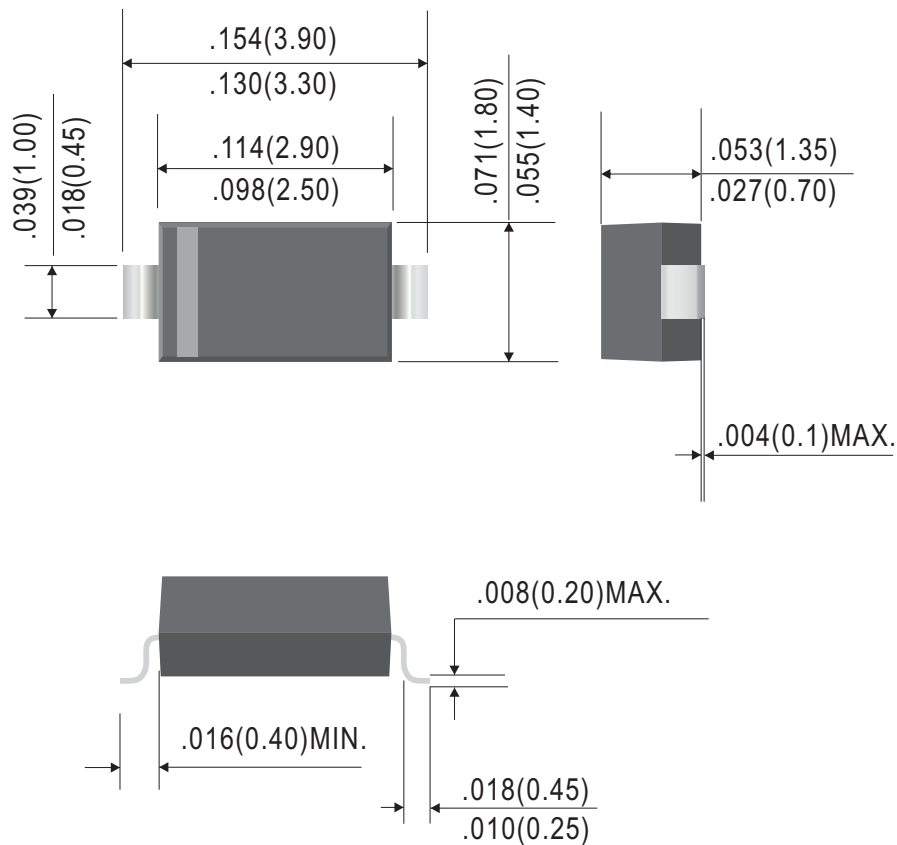


Fig.6 Forward Voltage vs. Forward Current

SOD-123 Mechanical Data


Dimensions in inches and (millimeters)

Marking

Type number	Marking code
SESD1Z5V	15
SESD1Z12V	112



Ordering Information:

Device PN	Packing
Part Number -T ⁽¹⁾ G ⁽²⁾ -WS	Tape&Reel: 3 Kpcs/Reel

Note: (1) Packing code, Tape & Reel

(2) RoHS product for packing code suffix "G" ; Halogen free product for packing code suffix "H"

Disclaimer

WILLAS reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. WILLAS or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on WILLAS data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. WILLAS does not assume any liability arising out of the application or use of any product or circuit.

WILLAS products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of WILLAS. Customers using or selling WILLAS components for use in such applications do so at their own risk and shall agree to fully indemnify WILLAS Inc and its subsidiaries harmless against all claims, damages and expenditures.